

Focus on Light Tower 14 years
We are more professional



RPLT-6800 HYDRAULIC LIGHTING TOWER



SPECIFICATION

| | | |
|---------------------------|--|-------------|
| ENGINE | KUBOTA D1105 DIESEL | |
| Type | Vertical 3-cylinder in-line water cooled | |
| Stand-by Engine Power(kW) | 9.5kW/50Hz | 11.5kW/60Hz |
| Rate Engine Power(kW) | 8.4kW/50Hz | 10.1kW/60Hz |
| RPM | 1500 | 1800 |
| Fuel consumption(L/h) | 1.25-1.85 | |

| | |
|------------|---------------------------------|
| ALTERNATOR | |
| Model | Chinese brand, 4-pole brushless |
| Rate Power | 7kW |


| | | |
|--------------------|------------|---------------------------|
| LIGHT FEATURES | option 1 | option 2 |
| Light (W) | 4X480W LED | 4x1000W metal halide lamp |
| Luminous Flux (lm) | 268,800 | 440,000 |
| Longevity(hrs) | 50000 | 2000 |

| | |
|--------------------------------|-----------------------------|
| MAST FEATURES | |
| Max. Extention Height (m) | 8 |
| Manual Rotation Operation Type | 350°non-continous Hydraulic |

| | |
|---------------------------|----------------|
| DIMENSIONS AND WEIGHT | |
| Dimensions(L x W x H)(mm) | 890kg |
| Weight(kg) | 4500*1350*1700 |

STANDARD EQUIPMENT

- LED lights 3 years warranty
- 100L plastic fuel tank against rust
- Control panel - state of the art
- Full hydraulic tower lift
- manual rotation
- optional 4 hydraulic stabilizer legs
- IP65 rated for LED LAMP
- Emergency stop
- Auxiliary Sokets

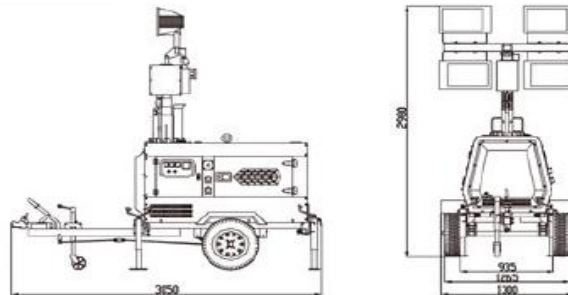

www.Robusterlighting.com